




Holdstein
Solutions

New ideas.
New concepts.

Data Sheet

Holdstein Gateway

Connect. Monitor. Simplify.

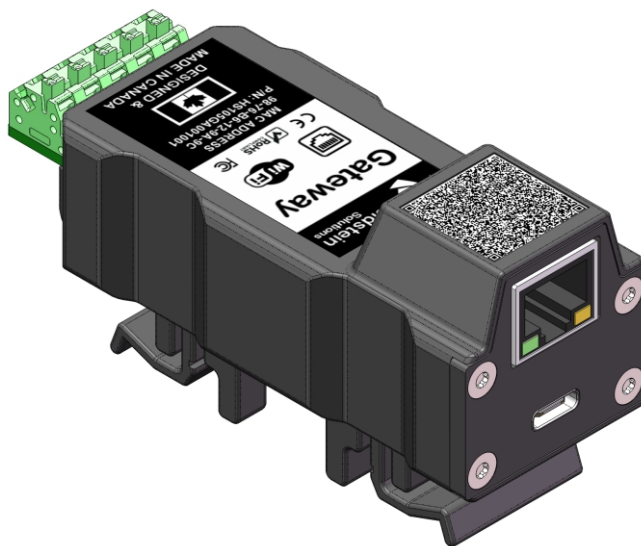

Powerful dual-core 240MHz processor
Ethernet, Wi-Fi and Bluetooth Connectivity
FCC/CE certification



Holdstein Solutions presents the Gateway Holdstein, an easy-to-use device designed to facilitate connectivity and monitoring of digital and analog sensors in industrial environments.

Connecting existing sensors to modern networks or integrating new sensors, the Gateway Holdstein offers a secure and practical solution. It supports Ethernet, Wi-Fi, and Bluetooth connections, enabling reliable communication with digital and analog sensors. You can monitor devices remotely, collect real-time data, and integrate solutions with cloud services, all with the necessary security for industrial applications.

The Gateway Holdstein adapts to existing infrastructures and new projects, contributing to a more connected and efficient industry. It is a powerful tool for OEMs and system integrators.

Overall Dimensions:

- 92.4 x 48.5 x 37mm
- 3.60 x 1.90 x 1.46 in
- Weight: 0.07kg [0.15 lb]

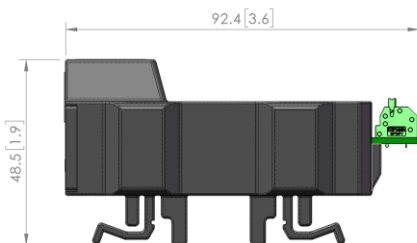

External Interfaces:

- USB-C (Power)
- Ethernet (RJ45)
- Terminal Block
- DIN Rail

Holdstein Gateway General Specifications

Ethernet Specifications

IEEE 802.3 Compatible: Supports Ethernet standards for MAC and PHY, accommodating 10Base-T and 100Base-TX networks.

Auto-Negotiation/Auto MDI/MDIX: Automatically adjusts for transmission speed (10/100 Mbps) and cable configuration (crossover or straight-through) to optimize network communication.

Operation Modes: Supports both full-duplex and half-duplex operations, enabling simultaneous bidirectional communication in full-duplex and alternating unidirectional or bidirectional communication in half-duplex.

Independent Hardware Sockets: Multiples sockets enable multiple concurrent network connections for TCP, UDP, and other network protocols.

Protocol Support: Integrated support for TCP, UDP, IPv4, ICMP, ARP, IGMP, and PPPoE.

Integrated Memory: 32K bytes of built-in memory for RX/TX data buffering.

RJ-45 Connector with Integrated LEDs: Standard network connector with LED indicators for connection status and data activity.

Processing and Memory

Processor: Dual-Core 240 MHz, with high-performance processing capabilities.

Flash Memory: 8 MB, for storing programs and data.

PSRAM: 2 MB, for temporary data storage and enhanced support for applications that require extensive memory usage.

Connectivity

Wi-Fi: 802.11 b/g/n, integrated support for wireless network connections.

Bluetooth: Bluetooth Classic and BLE (Bluetooth Low Energy) for short-range wireless communication.

I/O Interfaces and Ports

USB-C: high speed new standard port for fast upload firmware and power

Ethernet:

Connector: 5-Pos Terminal Block

Certifications

Compliance: The communication module is fully certified with FCC/CE standards, ensuring it meets rigorous communication regulations and quality standards for global use.

Power Rating

Power: 5 Vdc, 3A

Power Required: Powered by external DC power adapter, 100-240V AC, 50/60 Hz (Optional)



Holdstein Solutions is an emerging Canadian company committed to advancing technology and its practical implementation in the industry. With a strong focus on research and development, we strive to deliver cutting-edge integrated software and hardware solutions that are both innovative and dependable. Our extensive expertise in the deep water oil & gas industry has enabled us to develop top-quality products over the years. Trust Holdstein Solutions for advanced technology solutions tailored to your industry needs.

Get in touch with us:

info@holdsteinsolutions.com
www.holdsteinsolutions.com